HOLY 60 V2

使用手册
User Manual

目录 CONTENTS

P01 目录 Contents





P02 物品清单 Item list

P03 尺寸规格 Size specification

P03 兼容 PCB PCB compatibility


P04-05 键盘结构 Keyboard structure

▶ 物品清单 Item list

编号 Number		名称 Name	数量 Quantity
#1		键盘外壳 Keyboard case	×1（个）
#2		匀光板 Diffuser plate	×1（个）
#3		内胆定位支撑臂 Inner liner positioning support arm	×1（对）
#4-1		定制硅胶圈（70A） Custom silicone ring(70A	×1（个）
#4-2		定制硅胶圈（50A） Custom silicone ring(50A))	×1（个）
#5		铜螺柱 Brass Standoffs	×1（套）
#6-1		小号 Gasket 胶垫 Mini Gasket	×1（套）
#6-2		中号 Gasket 胶垫 Mid Gasket	×1（套）
#7		硅胶脚垫 Silicone feet	×1（套）
#8		拔勾 Hook	×1（个）
#9		M2*4杯头梅花螺丝螺丝 M2*4 cup head screw	×1（套）
#10		M2*4沉头梅花螺丝螺丝（CD纹） M2*4 cup head screw	×1（套）
#11		T6螺丝刀 T6 screwdriver	×1（个）
#12		键盘包 Carrying case	×1（个）

Tips: 上述非标准配置，具体需以选配形式提供
The above non-standard configurations are available only through customization

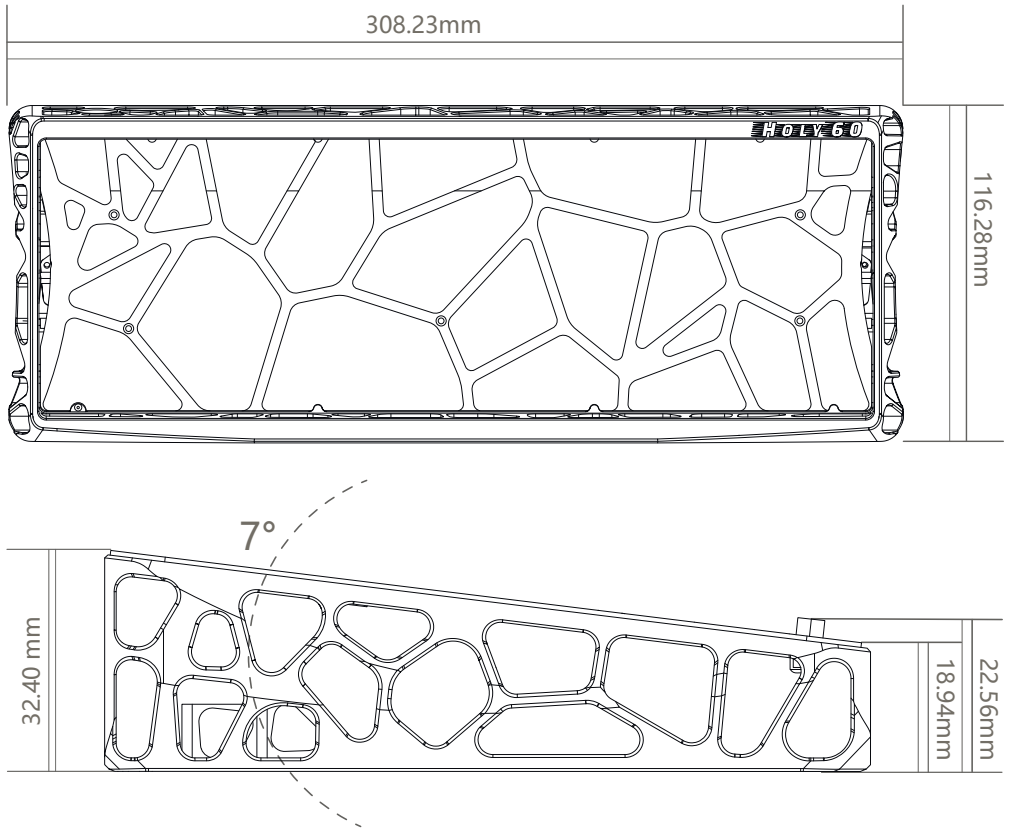▶ 尺寸规格 Size specification




Tips: 请及时检查键盘外观是否有运输过程中造成的伤痕及损伤,如发现任何缺陷请联系客服
Please promptly check the keyboard for any scratches or damage caused during shipping.
If any defects are found, please contact Customer Service

▶ 兼容 PCB PCB compatibility

	Tray Mount 结构 Tray Mount Structure	**O-ring Mount 结构** O-ring Mount Structure	**OG Mount 结构** OG Mount Structure
Wooting 60HE/HE+/V2 GH60 Tofix 60HE	✓	✗	✓
所需配件 Required Accessories	小号Gasket胶垫 / 铜螺柱 Mini Gasket / Brass Standoffs	不适用 N / A	小号Gasket胶垫 / 定制硅胶圈 Mini Gasket / CSR
Venom 60 HE Rakka V2 H60	✓	✓	✗
所需配件 Required Accessories	铜螺柱 Brass Standoffs	中号Gasket胶垫 / 定制硅胶圈 Mid Gasket / CSR	不适用 N / A

Ⅰ - Ⅰ Tray Mount 结构

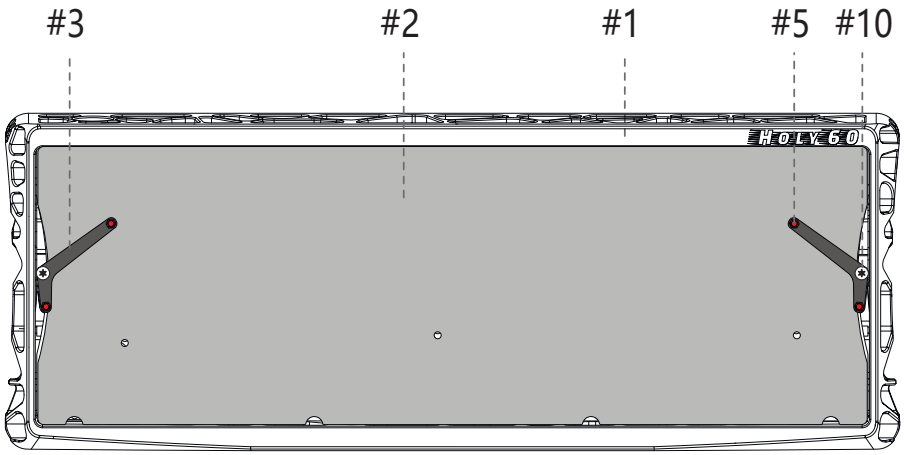
Ⅰ - Ⅰ Tray Mount structure



Tips: 首先把一字铜螺母装配在内胆定位支撑臂上，将左右内胆定位支撑臂固定到外壳；随后放入已组装完成的内胆组件，对准孔位，利用 4 个铜螺母完成内胆锁付固定。
Assemble the slotted brass nuts onto the liner locating support arms first, then secure the left and right liner locating support arms to the outer housing. Next, place the pre-assembled liner assembly, align the holes, and fasten the liner with 4 brass nuts.

Ⅰ -Ⅱ Oring 结构

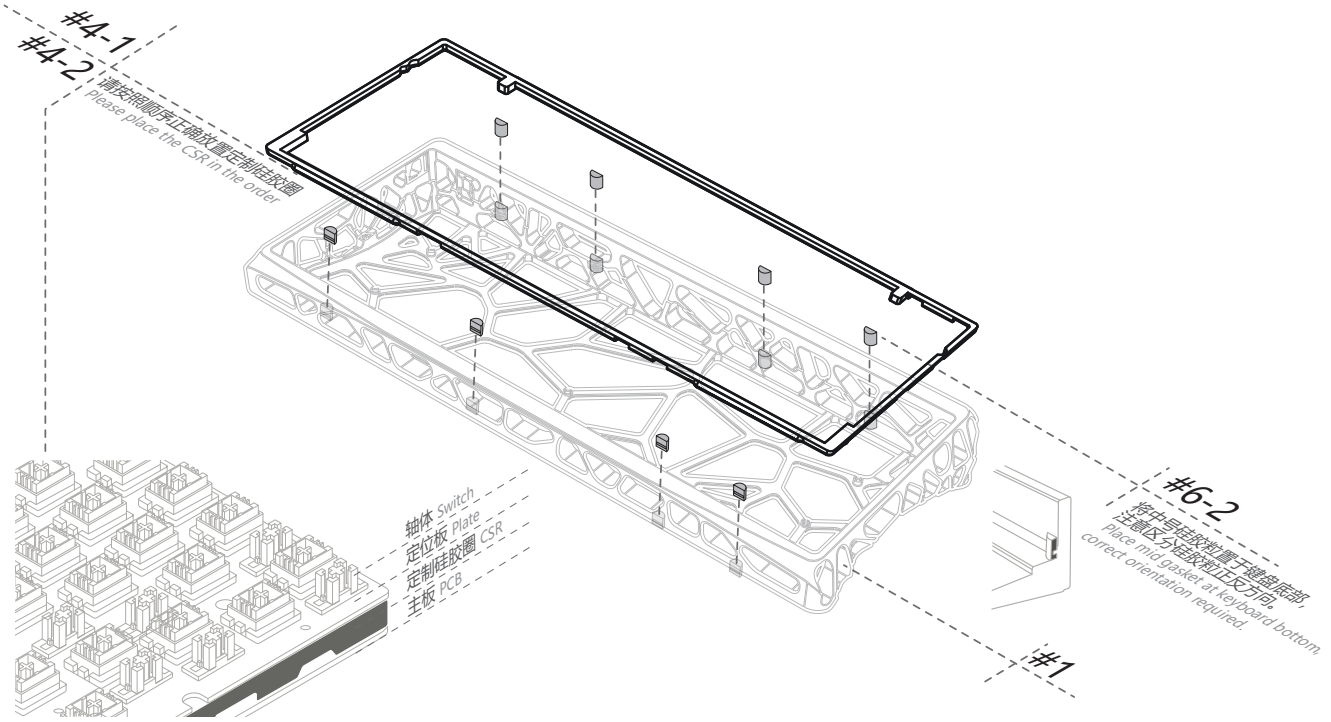Ⅰ -Ⅱ Oring structure



Ⅰ-Ⅲ OG 结构

Ⅰ-Ⅲ OG structure

